


PORTIONS OF SECTIONS 16, 21 & 28, TWP 24 N., RGE. 6 E., W.M.



WORK AREA DETAIL (TYPICAL)

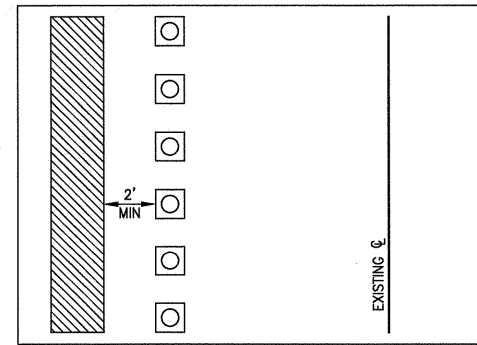

SIGN SPACING = X (FEET) (1)

RURAL HIGHWAYS	60 / 65 MPH	800'±
RURAL ROADS	45 / 55 MPH	500'±
RURAL ROADS & URBAN ARTERIALS	35 / 40 MPH	350'±
RURAL ROADS, URBAN ARTERIALS RESIDENTIAL & BUSINESS DISTRICTS	25 / 30 MPH	200'± (2)
URBAN STREETS	25 MPH OR LESS	100'± (2)

ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.

- (1) ALL SPACING MAY BE ADJUSTED TO ACCOMMODATE INTERCHANGE RAMP, AT-GRADE INTERSECTIONS, AND DRIVEWAYS.
 (2) THIS SPACING MAY BE REDUCED IN URBAN AREAS TO FIT ROADWAY CONDITIONS.

CHANNELIZING DEVICE SPACING (FEET)

MPH	TAPER	TANGENT
50 / 65	40	80
35 / 45	30	60
25 / 30	20	40

BUFFER DATA

LONGITUDINAL BUFFER SPACE = B

SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (FEET)	155	200	250	305	360	425	495	570	645	-

PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE

TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)	STATIONARY OPERATION (FEET)
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)	30 MIN. 100 MAX.



ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT

1 A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.


NOTES:

- NIGHT WORK REQUIRES ADDITIONAL ROADWAY LIGHTING AT FLAGGING STATIONS. REFER TO WSDOT STANDARD SPECIFICATIONS SECTION 1-10 FOR ADDITIONAL DETAILS.
- RECOMMEND EXTENDING CHANNELIZING DEVICE TAPER ACROSS SHOULDER.
- PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
- SIGN SEQUENCE IS THE SAME FOR BOTH DIRECTIONS OF TRAVEL ON THE ROADWAY.
- WHEN USED, THE DOWNSTREAM TAPER DEVICE SPACING SHOULD BE 20' O.C.
- FOR LOW-VOLUME SITUATIONS WITH SHORT WORK ZONES ON STRAIGHT ROADWAYS WHERE THE FLAGGER IS VISIBLE TO ROAD USERS APPROACHING FROM BOTH DIRECTIONS, A SINGLE FLAGGER POSITIONED TO BE VISIBLE FROM BOTH DIRECTIONS MAY BE USED.

LEGEND:

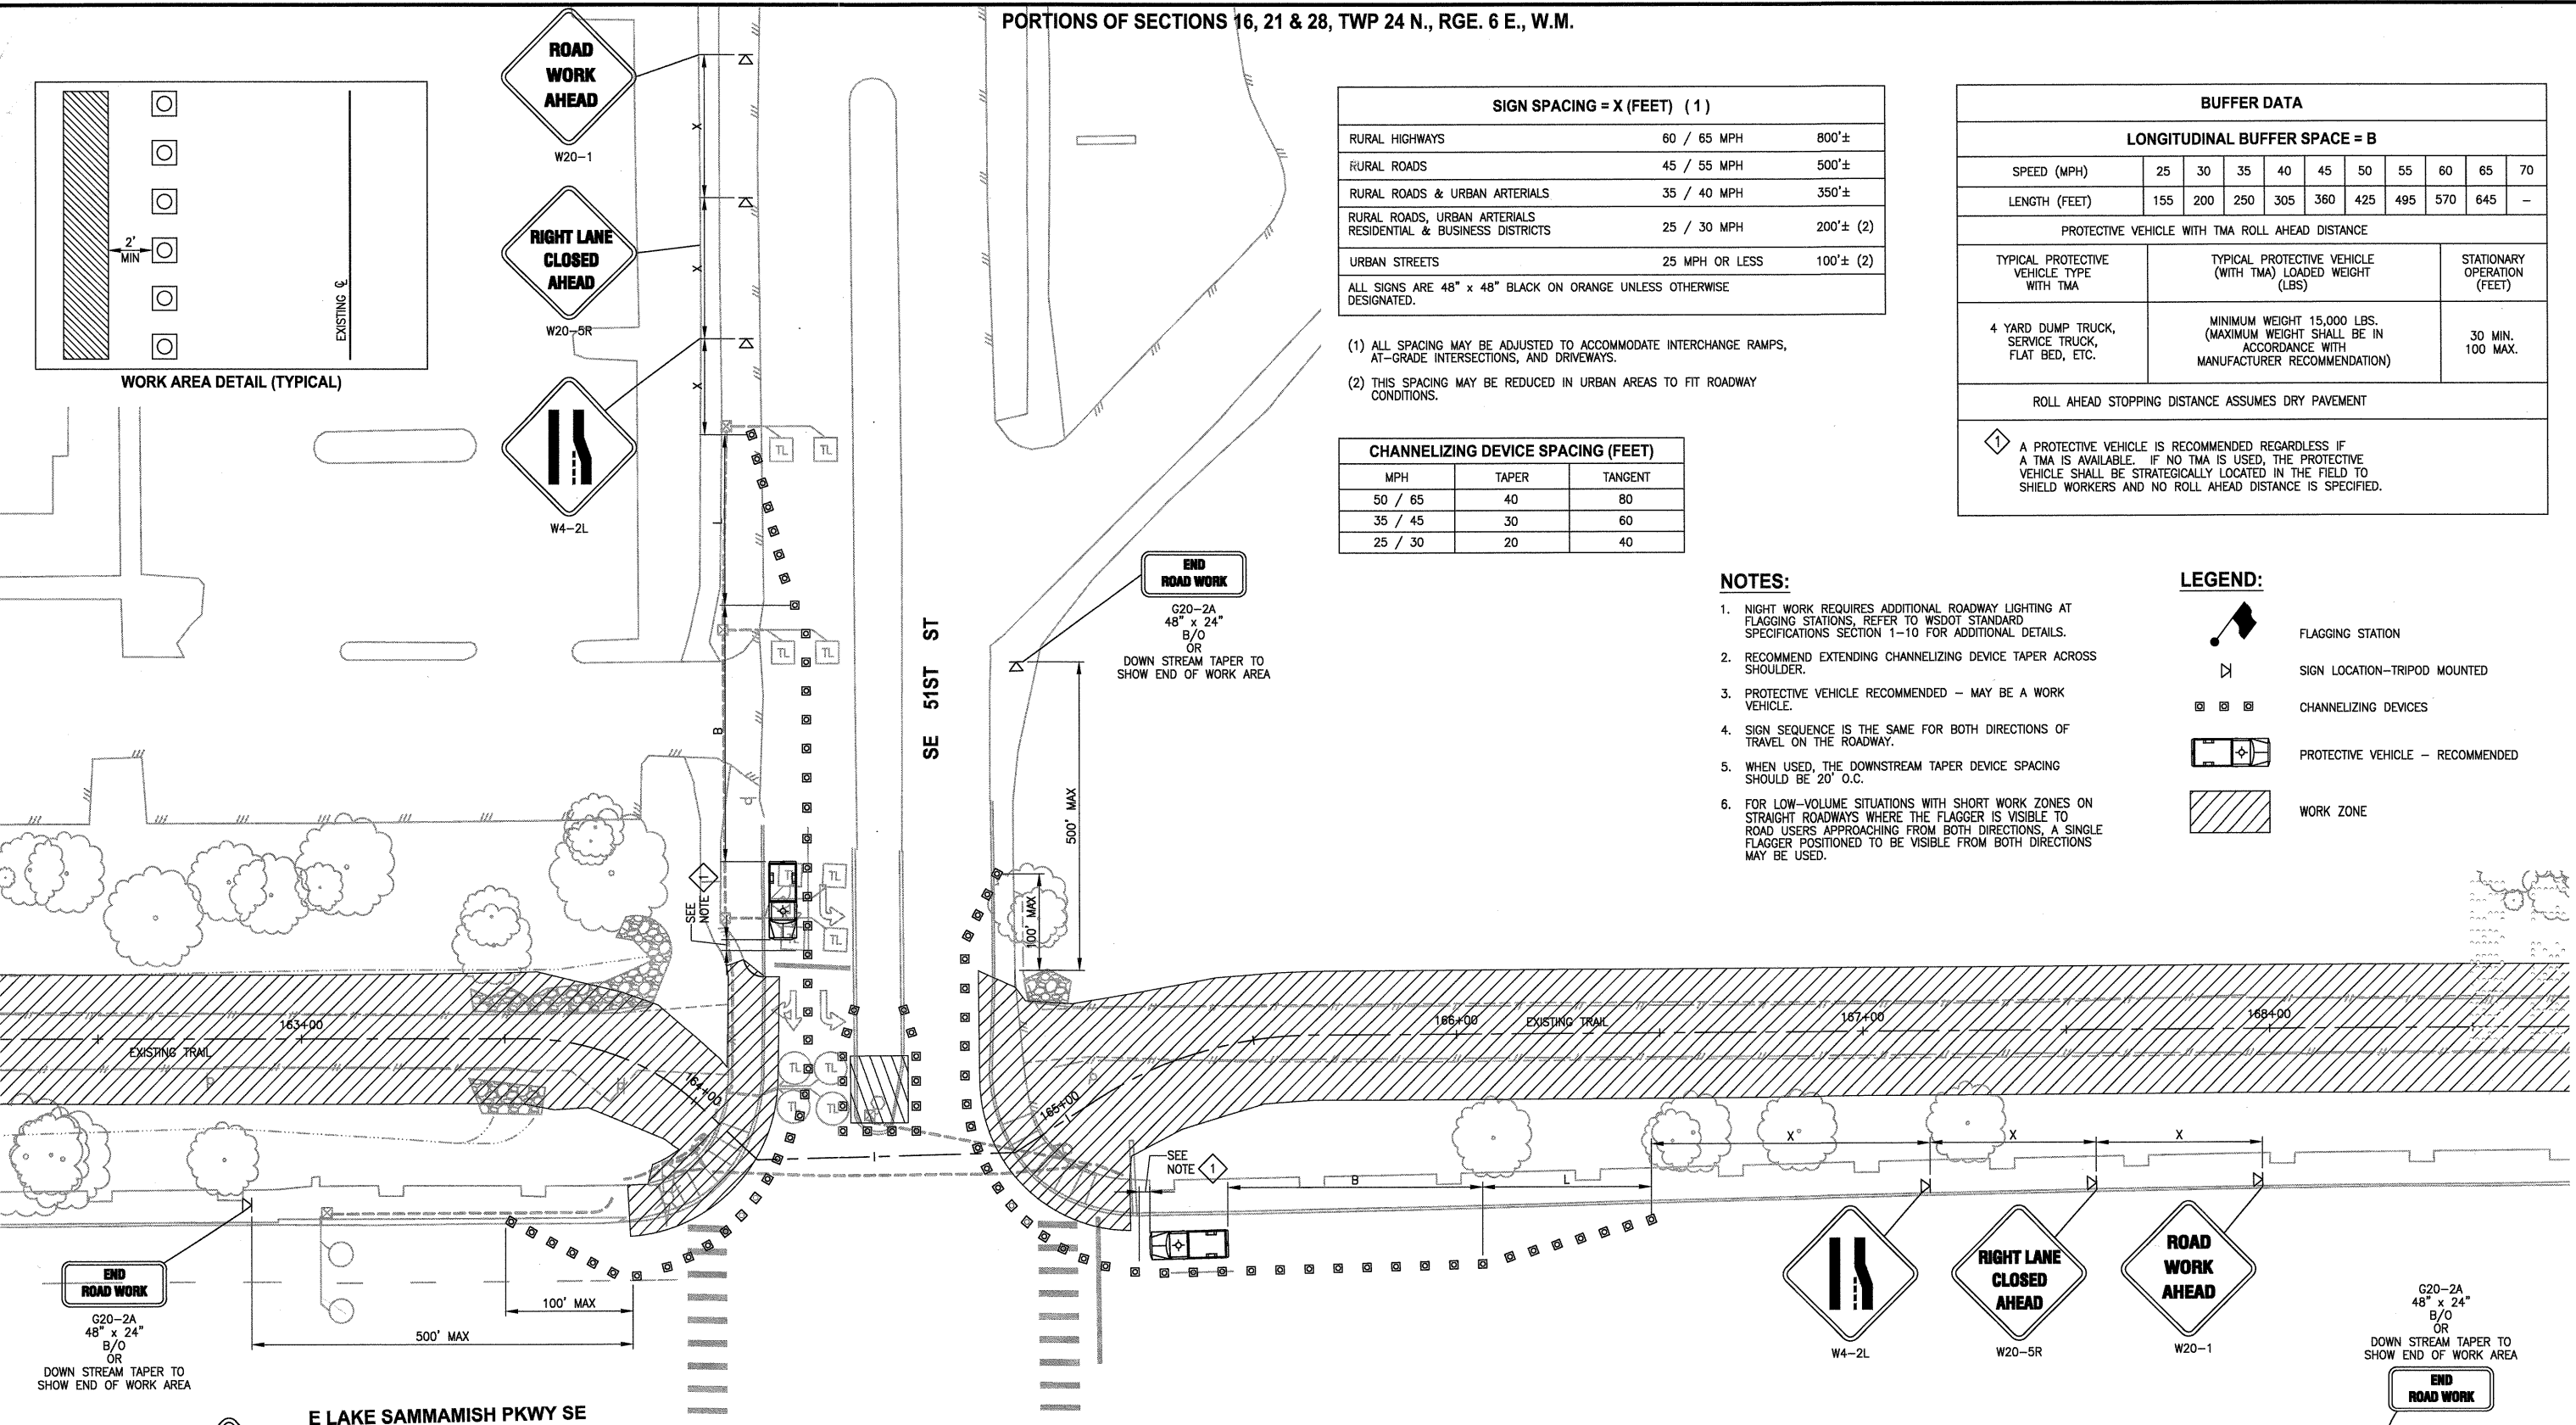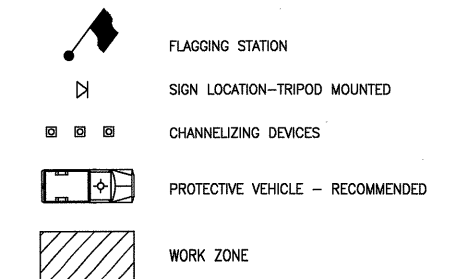


PATH: U:\Ball\Projects\Clients\1521-075-ELST\9856\CAADD\Phase 13\Task 02\Drawn.dwg
 PLOTTED BY: purganan DATE: Wednesday, November 23, 2011 12:20:26 PM
 LAYOUT: TC1

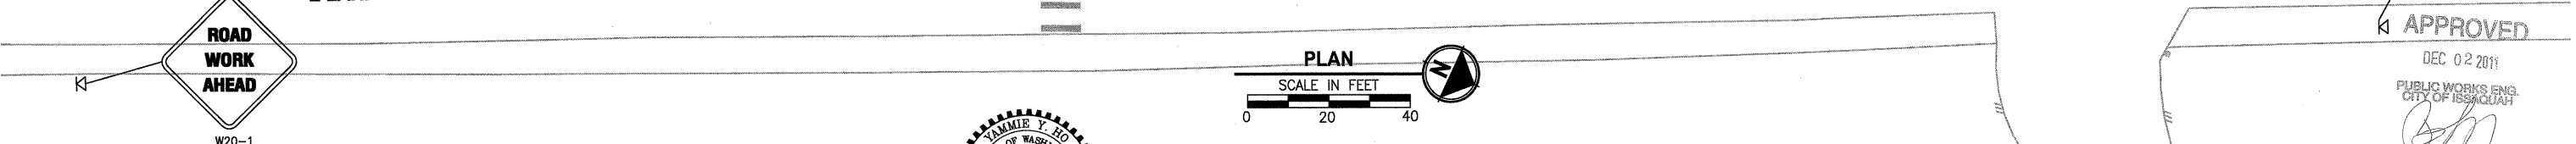

REVISIONS	DATE	BY	DESIGNED
			J. JUN
			B. PURGANAN
			Y. HO
			H. LONGFELLOW

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME: BL1521075P13T02TC-01
 JOB No: 554-1521-075
 DATE: NOVEMBER 2011



Parametrix
 ENGINEERING, PLANNING, ENVIRONMENTAL SCIENCES

411 108TH AVENUE N.E., SUITE 1800
 BELLEVUE, WASHINGTON 98004
 T: 425.458.8000 F: 425.458.6363
 www.parametrix.com

PROJECT NAME
**EAST LAKE SAMMAMISH
 MASTER PLAN TRAIL, ISSAQUAH SEGMENT**

GILMAN BLVD TO ISSAQUAH CITY LIMITS

TRAFFIC CONTROL PLAN

DRAWING NO.
 97 OF 99

TC1

PORTIONS OF SECTIONS 16, 21 & 28, TWP 24 N., RGE. 6 E., W.M.


SIGN SPACING = X (FEET) (1)		
RURAL HIGHWAYS	60 / 65 MPH	800'±
RURAL ROADS	45 / 55 MPH	500'±
RURAL ROADS & URBAN ARTERIALS	35 / 40 MPH	350'±
RURAL ROADS, URBAN ARTERIALS RESIDENTIAL & BUSINESS DISTRICTS	25 / 30 MPH	200'± (2)
URBAN STREETS	25 MPH OR LESS	100'± (2)

ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.

- (1) ALL SPACING MAY BE ADJUSTED TO ACCOMMODATE INTERCHANGE RAMP, AT-GRADE INTERSECTIONS, AND DRIVEWAYS.
- (2) THIS SPACING MAY BE REDUCED IN URBAN AREAS TO FIT ROADWAY CONDITIONS.

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50 / 65	40	80
35 / 45	30	60
25 / 30	20	40

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (FEET)	155	200	250	305	360	425	495	570	645	-
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)							STATIONARY OPERATION (FEET)		
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)							30 MIN. 100 MAX.		
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
⚠ A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

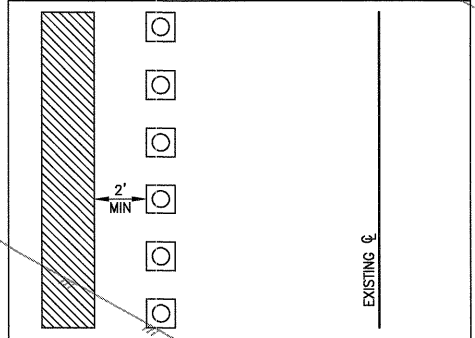

WORK AREA DETAIL (TYPICAL)




W20-1

NOTES:

- NIGHT WORK REQUIRES ADDITIONAL ROADWAY LIGHTING AT FLAGGING STATIONS. REFER TO WSDOT STANDARD SPECIFICATIONS SECTION 1-10 FOR ADDITIONAL DETAILS.
- RECOMMEND EXTENDING CHANNELIZING DEVICE TAPER ACROSS SHOULDER.
- PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
- SIGN SEQUENCE IS THE SAME FOR BOTH DIRECTIONS OF TRAVEL ON THE ROADWAY.
- WHEN USED, THE DOWNSTREAM TAPER DEVICE SPACING SHOULD BE 20' O.C.
- FOR LOW-VOLUME SITUATIONS WITH SHORT WORK ZONES ON STRAIGHT ROADWAYS WHERE THE FLAGGER IS VISIBLE TO ROAD USERS APPROACHING FROM BOTH DIRECTIONS, A SINGLE FLAGGER POSITIONED TO BE VISIBLE FROM BOTH DIRECTIONS MAY BE USED.

LEGEND:

- FLAGGING STATION
- SIGN LOCATION-TRIPOD MOUNTED
- CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED
- WORK ZONE

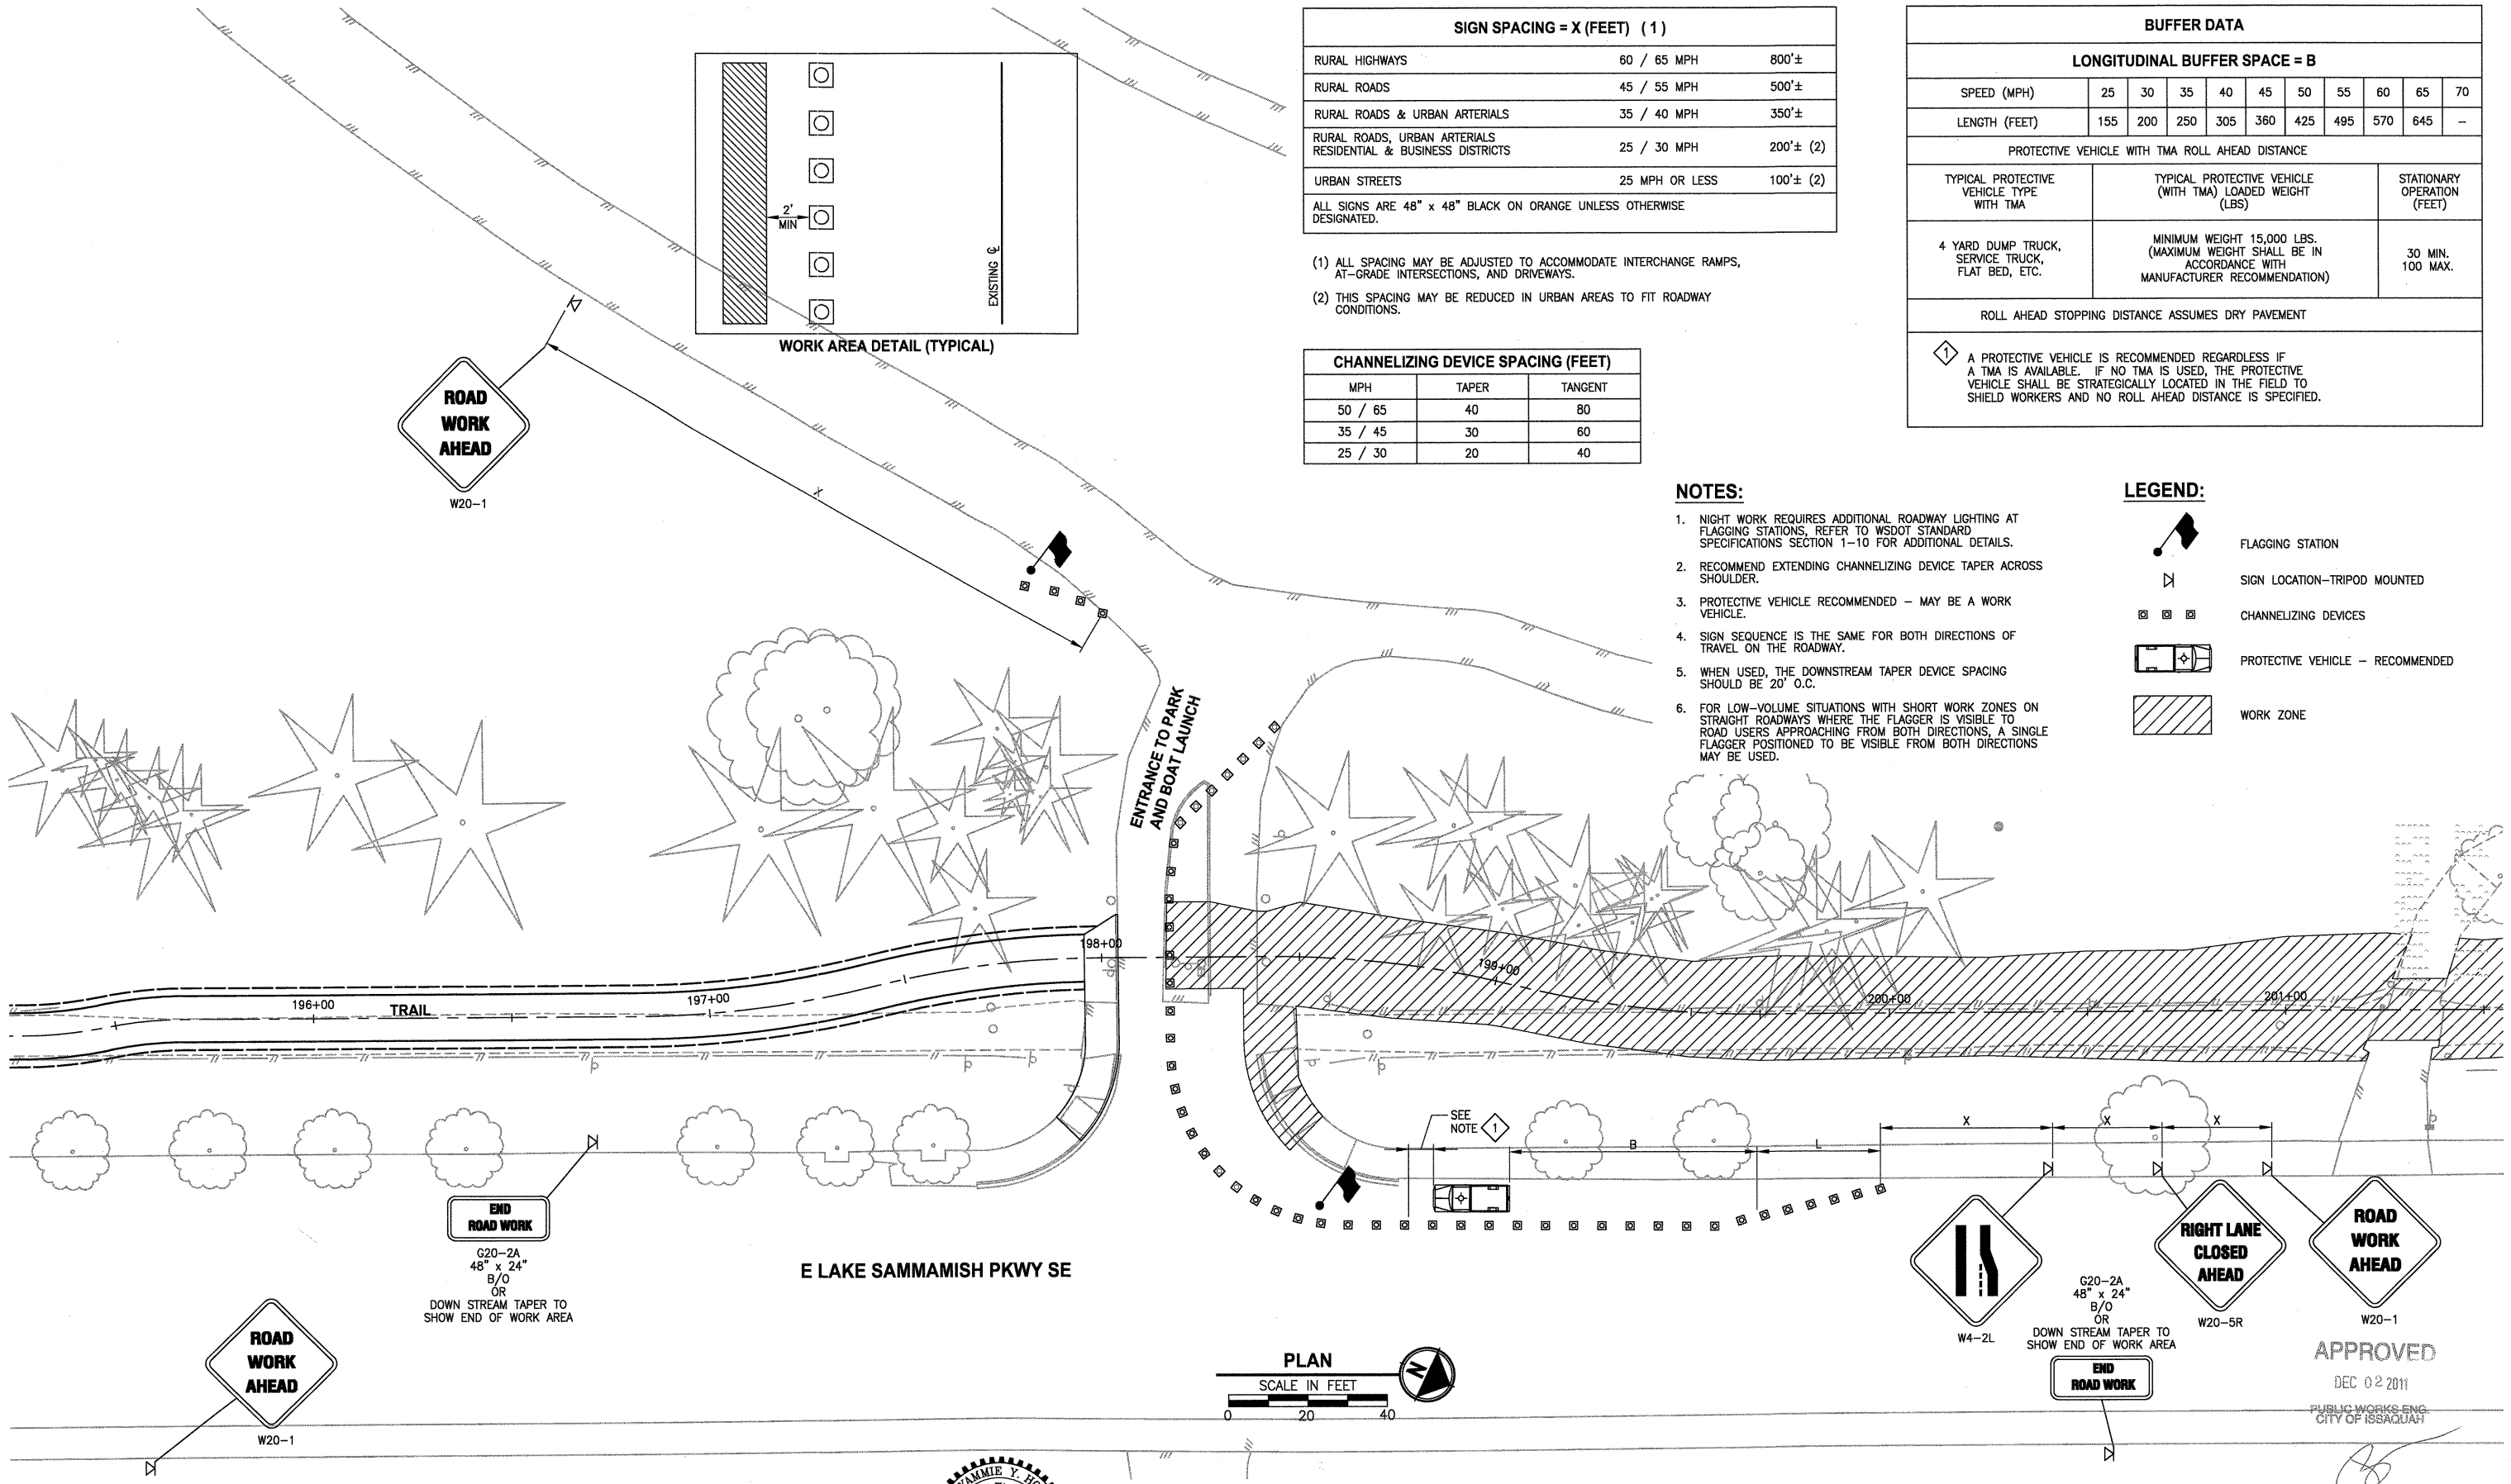

LAYOUT: TC3
 PATH: U:\Bell\Projects\Clients\1521-King_City\554-1521-075-ELST\985ves\CADD\Phase 13\Task 02_Dwg\...
 PLOTTED BY: purgobut DATE: Wednesday, November 23, 2011 12:28:49 PM

REVISIONS	DATE	BY	DESIGNED
			J. JUN
			B. PURGANAN
			Y. HO
			H. LONGFELLOW

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY

FILE NAME: BL1521075P13T02TC-01

JOB No: 554-1521-075

DATE: NOVEMBER 2011



Parametrix
 ENGINEERING · PLANNING · ENVIRONMENTAL SCIENCES

411 108TH AVENUE N.E., SUITE 1000
 BELLEVUE, WASHINGTON 98004
 T: 425-458-8200 F: 425-458-8303
 www.parametrix.com

PROJECT NAME
EAST LAKE SAMMAMISH MASTER PLAN TRAIL, ISSAQUAH SEGMENT
 GILMAN BLVD TO ISSAQUAH CITY LIMITS

TRAFFIC CONTROL PLAN

DRAWING NO.
 99 OF 99
TC3